










## DRAWING APPROVAL

- ☐ APPROVED
  - ☐ APPROVED AS NOTED
  - ☐ REVISE AND RESUBMIT

DATE: \_\_\_\_\_

PER: \_\_\_\_\_

## LEGEND

- |   |                  |
|---|------------------|
|  | HEAT DETECTOR    |
|  | MASTER SWITCHES  |
|  | OUTLET SWITCHES  |
|  | 3 WAY SWITCH     |
|  | THERMOSTAT       |
|  | ALARM            |
|  | DIMMER SWITCHES  |
|  | QUAD RECEPTICLES |
|  | RECESSED LIGHTS  |

## FEATURES:

- 36"W X 73 3/4"H CLEAR OPENING PIGGY BACK DOOR
- STATIC EXHAUST AND STATIC INTAKE CEILING SILENCERS 8" COLLAR COVERS TO BE PROVIDED
- SPRINKLER ACCESS HOLE C/W COVER BOX WITH 2" OPENING TO ACCOMMODATE HOSE
- STANDARD INCANDESCENT RECESSED LIGHTING
- 4" FLOOR IN EXAM ROOM C/W RD-3 GREEN ISOLATORS
- TILE FLOOR ( BY OTHERS )
- FOUR QUAD OUTLETS C/W ONE MASTER SWITCH INSIDE ROOM, ONE QUAD OUTLET C/W MASTER SWITCH OUTSIDE ROOM
- DOUBLE WIDE UTILITY BOXES FOR ALL SWITCHES
- ELECTRICAL PASS THROUGH WITH PULL WIRE ARE PROVIDED FOR HEAT DETECTOR, THERMOSTAT, FIRE ALARM. THESE PARTS SHALL BE SUPPLY BY OTHERS
- RF SHIELDING PACKAGE ( ROOM ONLY - NO FILTERS)
- WATER & ICE SHIELD ROOFING PAPER SUPPLIED BY OTHERS
- HCF90 WIRING
- TWO 3 WAY SWITCHES FOR LIGHTS ( ONE INSIDE ONE OUTSIDE ) & ONE MASTER SWITCH FOR ENTIRE ROOM
- COLOUR: STD. LINEAR WHITE.

REVISIONS		
NO.	DATE	DESCRIPTION
REV D	JUNE 24/08	ADDED RF SHIELDING TO OUTER QUADS
REV E	AUGUST 31/12	OUTSIDE DOOR SIZE CHANGED TO 36" CLEAR OPENING. INSIDE DOOR CHANGES TO INSWING
REV F	09/04/12	REVISIONS AS PER EMAIL REQUESTS

**PROPRIETARY NOTICE:** This document contains proprietary information of Eckel Industries of Canada Limited, and neither the document nor said proprietary information shall be published, reproduced, copied, disclosed, or used for any purpose without the express written permission of a duly authorized representative of said company.

**ECKEL** INDUSTRIES OF CANADA LIMITED  
P.O. Box 776, Morrisburg, Ontario K0C 1X0  
Phone (613) 543-2967 Fax (613) 543-4173







CUSTOMER

FPA

TITLE: 1010D MOD REV

SCALE:	DRAWN BY:	DATE:
--------	-----------	-------

9/32" = 1'		
PROPOSAL: P-2429B	PROPOSAL DATE: Apr. 9, 2012	DRAWN BY: J. LEBLANC
CHD BY:	APPD BY:	SHT NO.: 01
	DATE:	

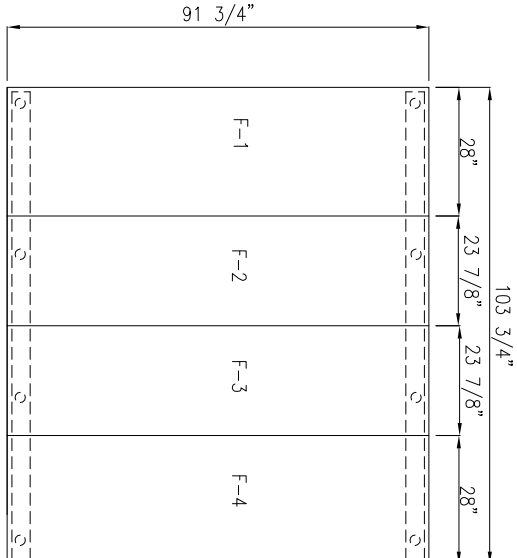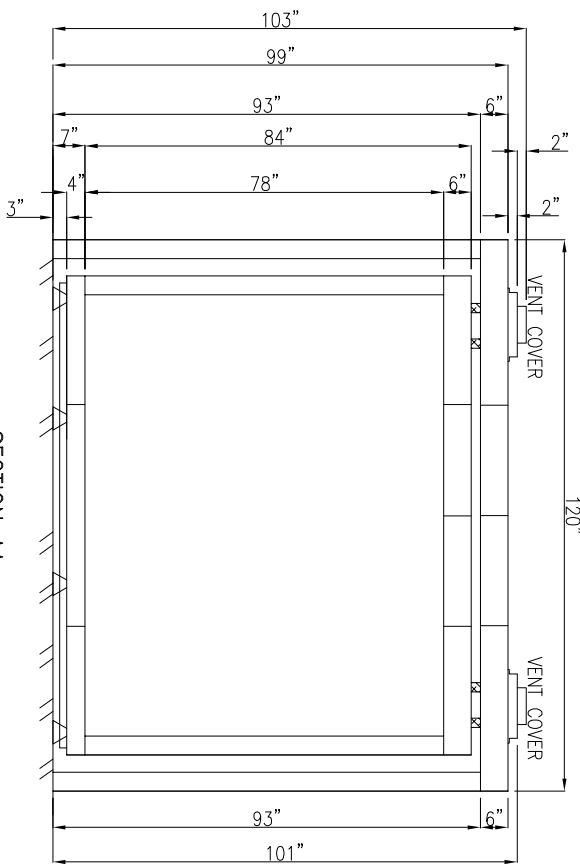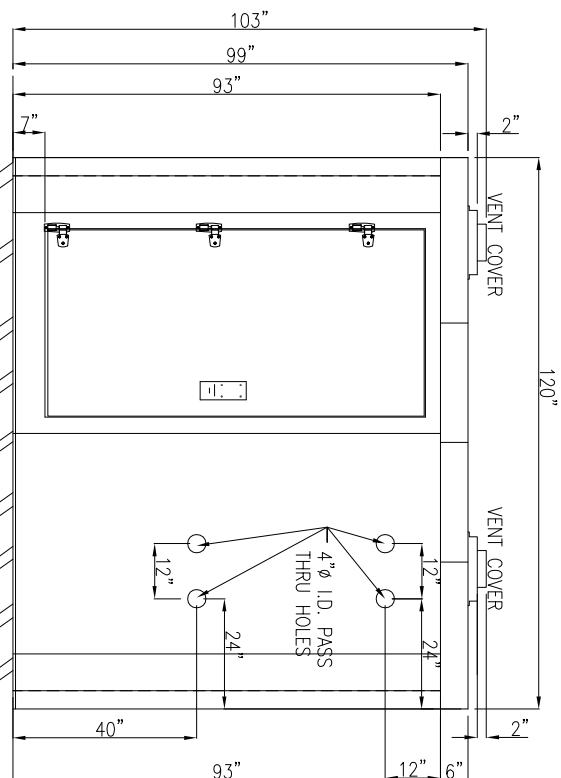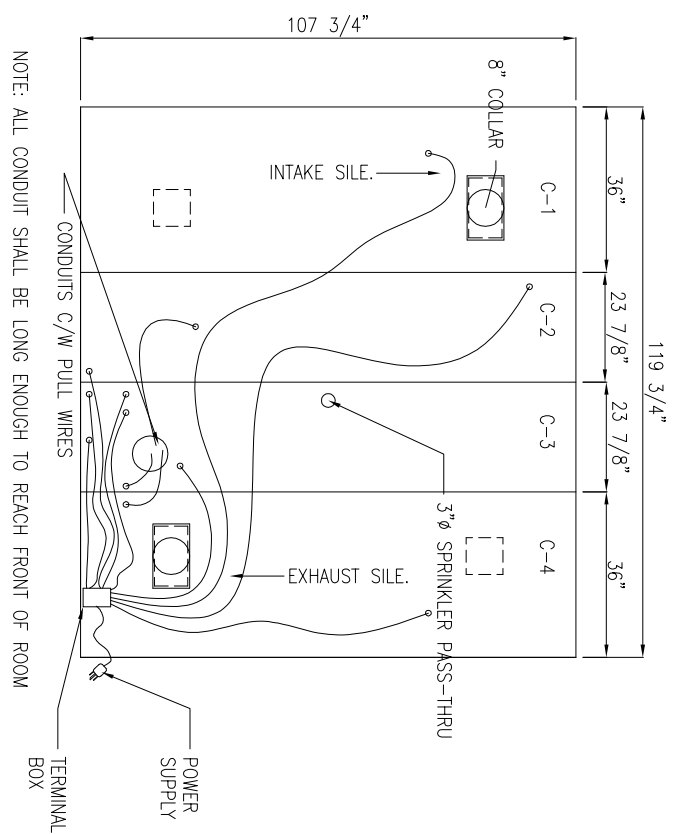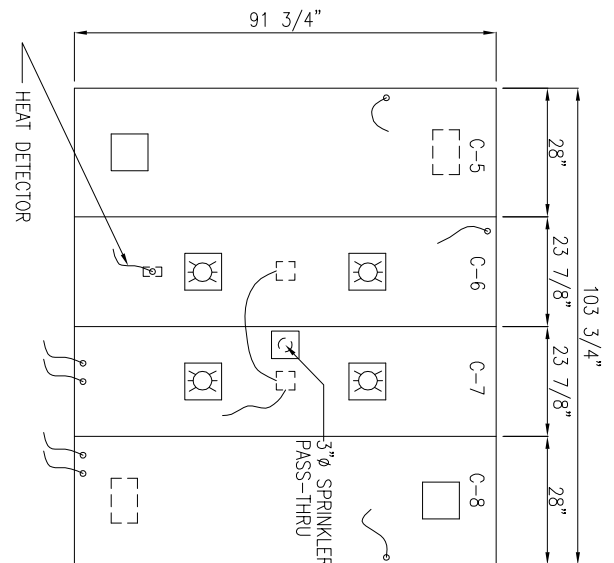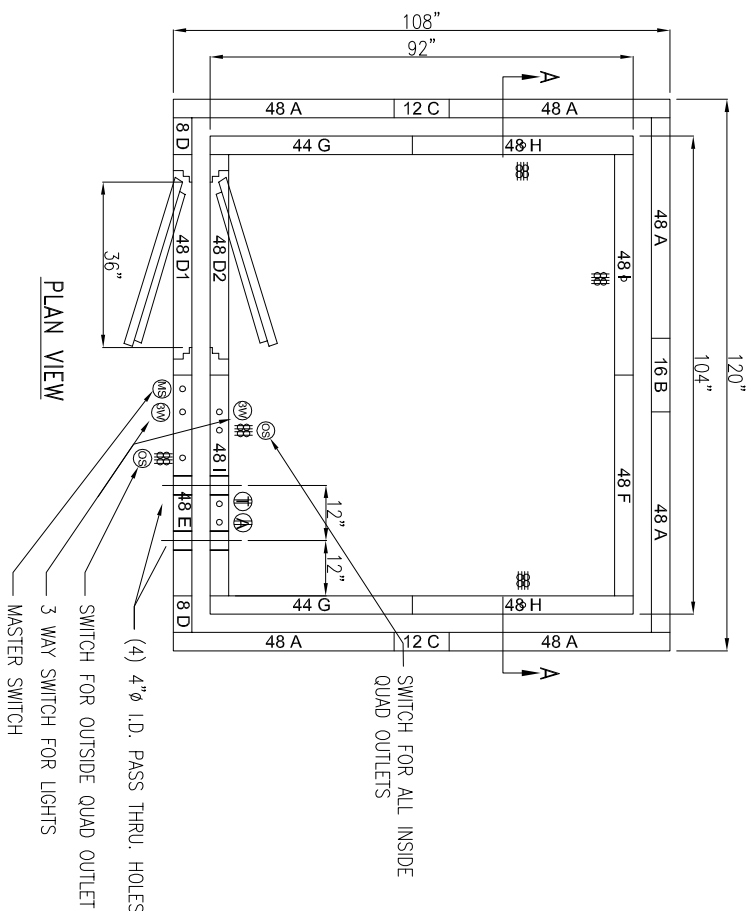

## OUTSIDE DOOR OPENING